
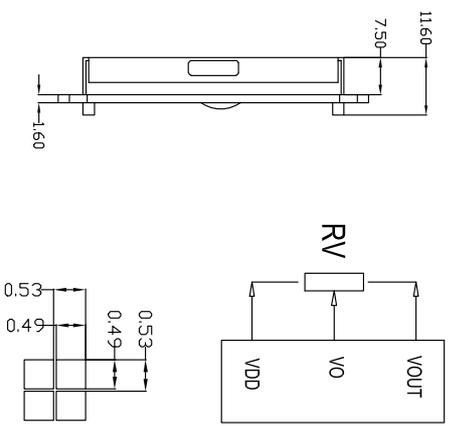


Customer approval :

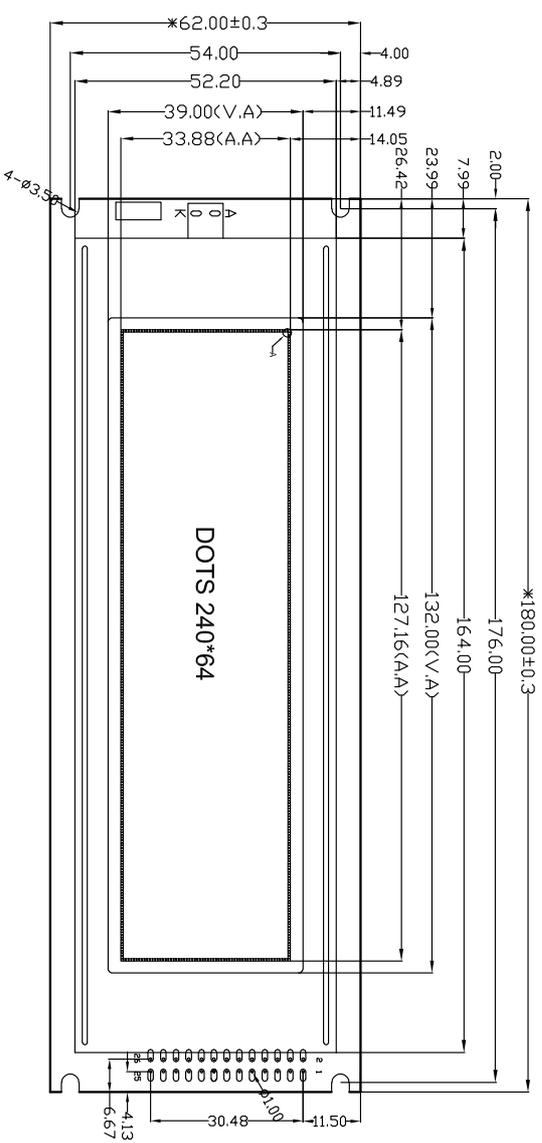

Specification:

- 1). Driving: DotS:240\*64, Duty:1/64, Bias:1/9,VDD:5.0V,VOUT:-14.08V,VO:-7.8V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode:STN/Blue/Negative/Transmissive
- 4). Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- 5). Controller IC:RA8822
- 6). Backlight: White
- 7). Dimensions with mark "H" are important,  
with mark "V" are referenced
- 8). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13
CONNECTION	VOUT	VO	GND	VDD	BUSV	NC	CS	RS	WR	RD	DB0	DB1	DB2
PIN	14	15	16	17	18	19	20	21	23	25	22	24	26
CONNECTION	DB3	DB4	DB5	DB6	DB7	RES	NC	BLA	BLA	BLA	BLK	BLK	BLK

REVISION RECORD		REV	DRAWING NO.		CHECKED BY		DRAWING BY		UNIT:	GENERAL TOL:	PAGE
First Issue		A0	SYM24064BZK/V20-5C8BLNTR8		Francis		LAN		mm	± 0.3	1/1
			APPROVED BY		2013/04/03		2013/04/03				


**深圳市三元晶科技术有限公司**  
 ShenZhen TCC HI-Tech Co., Ltd.